

### TKS-088c-TB38-MODUL



#### FEATURES

- Panel mount version with reserve side threaded bolts
- Excellent tactile feedback
- Haptic printing
- Integrated 38-mm trackball
- Chemical, abrasion and scratch resistant frontsheet
- Resistant against dirt, dust and liquids (IP65)

#### TECHNICAL DATA

Number of keys: 88  
 Mounting type: front panel with threaded bolts  
 Front panel material: aluminium  
 Keyswitch technology: short travel keys  
 Switching cycles: approx. 3 mill. (per key)  
 Operating force: 2.6 N  
 Switch travel: 0.3 mm  
 Protection level: IP65 static, IP54 dynamic  
 Interfaces: USB  
 USB compatibility: USB V1.1 compliance  
 Operating temperature: 0 °C to +70 °C

Storage temperature: -25 °C to +80 °C  
 Dimensions: 370 x 180 x 56 mm  
 Compliance:  
 -- Global: REACH,  
 RohS self-declaration  
 Weight: 1100 g

#### TECHNICAL DATA TRACKBALL


Ball diameter: 38 mm  
 Ball material: phenolic resin  
 Operating principle: mechanical

Cat.No.	Product description	Interface	Layout
KS18292	TKS-088c-TB38-MODUL-USB-DE	USB	German
KS18293	TKS-088c-TB38-MODUL-USB-US	USB	US

Other language versions/interfaces/configurations available on request.

Subject to modifications and errors

## TECHNICAL DRAWING (in mm)

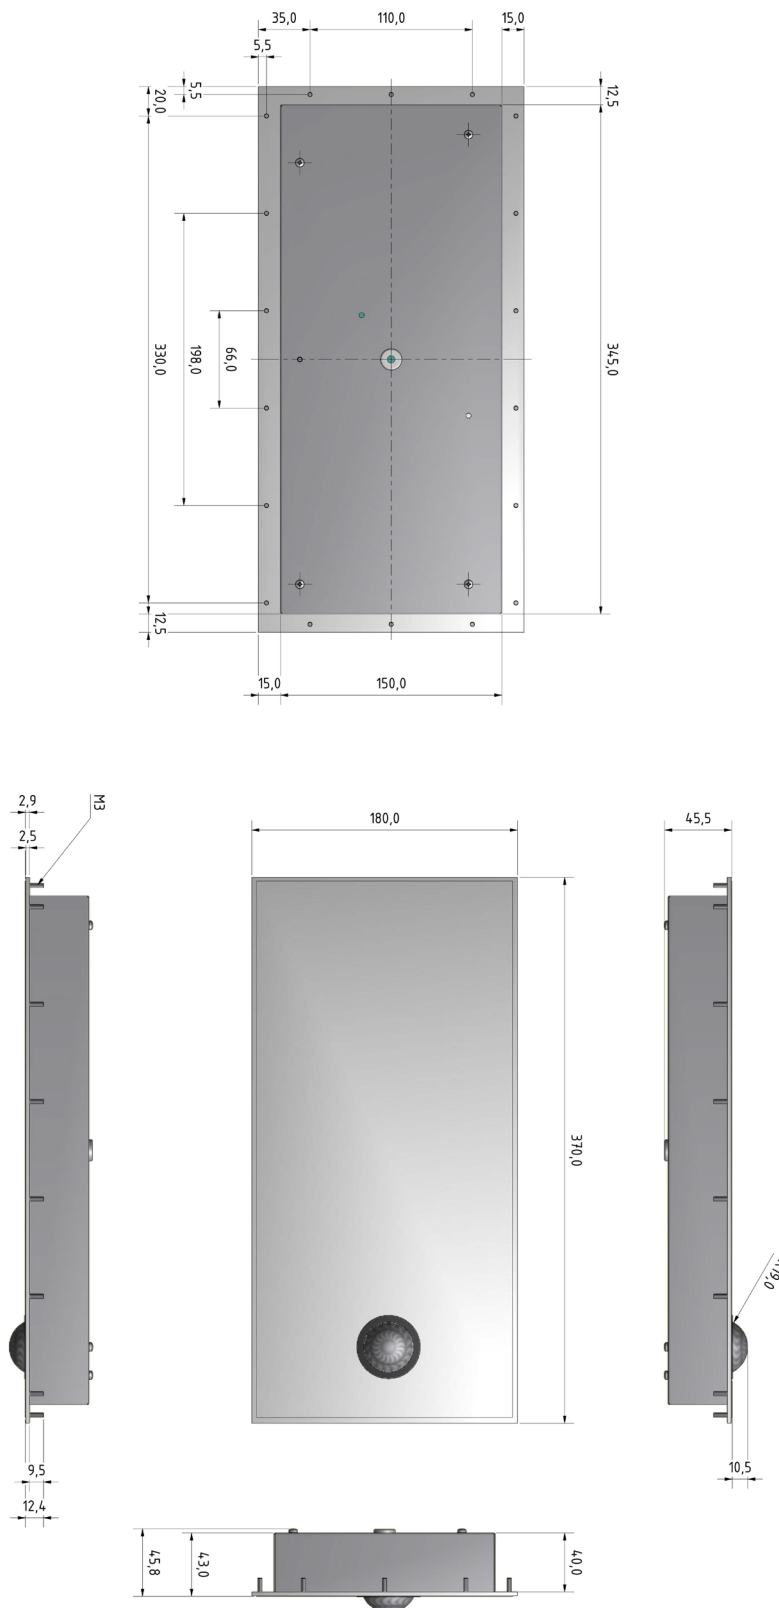

Subject to modifications and errors

GETT Gerätetechnik GmbH

Mittlerer Ring 1 | 08233 Treuen | Germany  
 Tel: +49 37468 660-0  
 Fax: +49 37468 660-66  
 E-Mail: info@gett.de  
 Internet: www.gett.de

Gett North America LLC

E-Mail: info@gett-na.com  
 Internet: www.gett-na.com

Gett Asia Ltd.

E-Mail: info@gett-asia.com  
 Internet: www.gett-asia.com